



## Power Supply Surge Protective Devices SPD SC-10KV-277 For 220V Power Grid

Our Product Introduction

### Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: SC-10KV-277
- Minimum Order Quantity: 270PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



### Product Specification

- Product Name: Surge Protective Devices (SPD)
- Size: 35×26×14mm
- Rated Operating Voltage: 220VAC
- Max. Continuous Voltage: 277VAC
- Response Time: 65ns
- Cross-section Area: 1mm<sup>2</sup>
- V<sub>n</sub>: 10kV
- V<sub>max</sub>: 20kV
- L-N/PE: 1.2kV
- N-PE: 1.0kV
- Highlight: Power Supply Surge Protective Devices, 220V Surge Protective Devices



for more products please visit us on [socaydiode.com](http://socaydiode.com)

## Product Description


SOCAY Surge Protective Devices (SPD) SC-10KV-277 Power Supply Surge Protector Suitable for 220V Power Grid

**DATASHEET:** [SC-10KV-277\\_v2209.1.pdf](#)

| Symbol                        | Parameter                                   | Value | Unit            |
|-------------------------------|---|-------|-----------------|
| Electrical Parameters         | Rated Operating Voltage                     | 220   | VAC             |
|                               | Max. Continuous Voltage                     | 277   | VAC             |
|                               | Response Time                               | 65    | ns              |
|                               | Cross-section Area                          | 1     | mm <sup>2</sup> |
| Surge Parameters              | Nominal Discharge Voltage (1.2/50μs) (Vn)   | 10    | kV              |
|                               | Maximum Discharge Voltage (1.2/50μs) (Vmax) | 20    | kV              |
| Voltage Protection Level (Up) | L-N/PE                                      | 1.2   | kV              |
|                               | N-PE  | 1.0   | kV              |

Notes:

1. Nominal discharge voltage surge times:±15T;
2. Maximum discharge voltage surge times:1T.

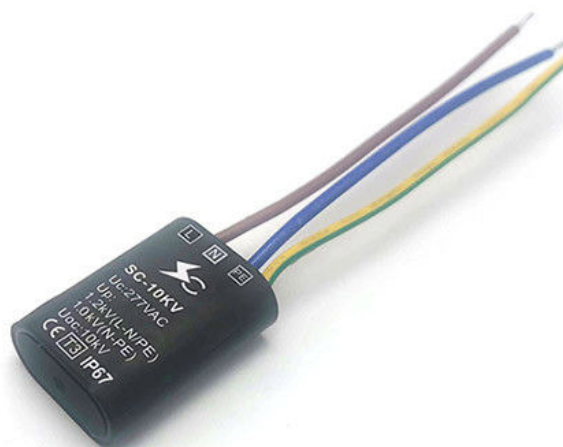

### Description:

SC-10KV-277 is a kind of power supply surge protector suitable for 220V power grid. Used in street lighting, landscape lighting, etc. The shell of the product is made of flame-retardant material, and the product is made of potting glue. It has the characteristics of fire prevention, waterproof and dustproof. Protection grade up to IP67. Installation and application is very convenient, with L, N and PE connection line.


### Features:

- u The product has full mold protection function. The product has a maximum protection can withstand the impact of 10kV surge voltage.
- u The size of the product is small, 35×26×14mm (excluding the connecting wire).
- u It is a Class III power SPD.
- u Parallel connection mode is adopted.
- u Adopt our company's new structure technology manufacturing, break through the conventional structure technology. This process can improve the impact resistance of SPD.
- u Executive standard: IEC/EN:61643-11.
- u Operating Temperature Range: -40 to +85 .

#### Applications:

Outdoor and Commercial LED Lighting.  
Roadway lighting.  
Traffic lighting.  
Digital signage.  
Security power supply.  
Wash wall lighting.  
Parking garage lighting.  
Flood lighting.  
Tunnel lighting.


#### Application/ Installation Schematic

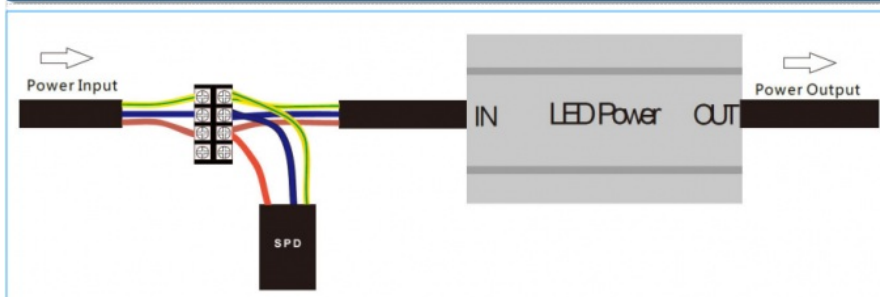

#### Notes:

1. The brown wire is L wire, the blue wire is N wire, and the yellow-green wire is the ground wire.
2. After the wire is installed, the product can be tied to the power supply with cable ties. Due to the small volume and weight of the product, it can also be placed freely as shown in Figure 2 of the installation example.

#### Typical Dimensions

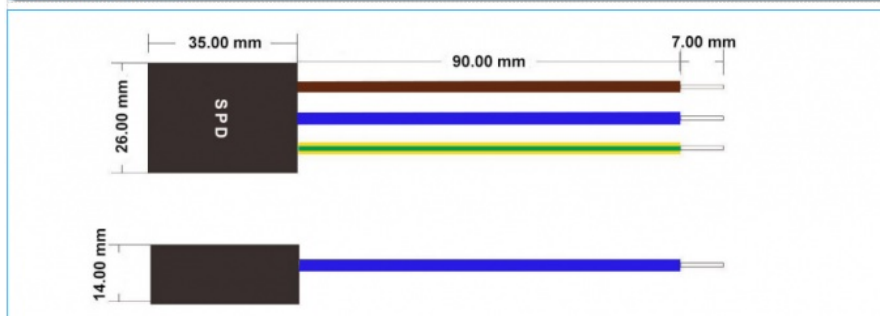

| Part Number | Quantity      |
|-------------|---------------|
| SC-10KV-277 | 270 PCS / Box |

 **Shenzhen Socay Electronics Co., Ltd.**

 +8618126201429  sylvia@socay.com  socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City,  
GuangDong Province, China